


CUSTOM LIGHTING LTD.

M A N U F A C T U R I N G • D E S I G N • T E C H N O L O G Y

CL-8-LED-VAP LED Gasketed Enclosure

- > IP65 Certified (Low Pressure Hose Test).
- > UL/cUL Recognized Component Listed.
- > NSF International certified for NSF/ANSI Standard 2 - Food Equipment.
- > Housing is compression molded self-extinguishing fibreglass reinforced polyester compount with UL 5V flame rating & F1 weatherability rating.
- > Perimeter poured gasket and tamper resistant stainless steel or polycarbonate latches seal the enclosure from most hostile environments.
- > Tapered high-diffusion acrylic prismatic with 85% transmission.
- > 7/8" conduit entry points on both ends of housing.
- > LED modules available from 3000K to 5000K with 50,000 hour L70 life utilizing 0-10V dimming drivers in 120-277V or 347V configurations.



Ideal for:

- > Food Processing Facilities
- > Cold Storage
- > Commercial Kitchens
- > Industrial Facilities
- > Parking Garages
- > Car Washes
- > Swimming Pools
- > Tunnels

Construction

22 gauge PFW steel high gloss fixture white finish

Colour Rendering Index

> 80 CRI

Lumen Maintenance

> 50,000 (L70)

Input Watts

40W - 5600lm | 58W - 8800lm | 80W - 11200lm | 108W - 16000lm | 115W - 17600lm | 150W - 24000lm | 216W - 32000lm

Voltage

120/277V | 347V | 480V

Correlated Colour Temperature Options (CCT)

3000K | 3500K | 4000K | 5000K

Controls

0-10V Dimming (standard)

Operating Temperature

-40°C to 50°C

LED Array & Driver



- > Phillips Advance Xitanium Linear LED Driver with SimpleSet technology, 0-10V Dimming
- > Phillips Formmo LV1 & LV3 LED Arrays

Certifications



Warranty

> 10 years

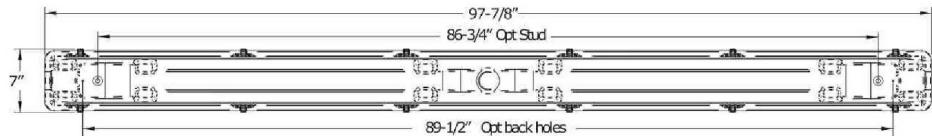

Ordering Logic (Choose from available options)

Model	Finish	Voltage	Control	Correlated Colour Temperature	Lumen Output	Gasketed Enclosure
CL-8	<input type="checkbox"/> PFW	<input type="checkbox"/> UNV - 120-120V <input type="checkbox"/> 347 - 347V <input type="checkbox"/> 480 - 480V	<input type="checkbox"/> D10 - 0-10V DIMMING	<input type="checkbox"/> 30 - 300K <input type="checkbox"/> 35 - 3500K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> 5600lm (40W) <input type="checkbox"/> 8800lm (58W) <input type="checkbox"/> 11200lm (80W) <input type="checkbox"/> 16000lm (108W) <input type="checkbox"/> 17600lm (115W) <input type="checkbox"/> 24000lm (150W) <input type="checkbox"/> 32000lm (216W)	<input type="checkbox"/> VAP - IP65 Vapourproof Gasketed Enclosure



Custom Lighting Ltd. 7923 Coronet Road, Edmonton, AB, T6E 4N7

Tel: (780) 463-8014 Fax: (780) 463-2216 Email: sales@customlightingltd.com www.customlightingltd.com

FEB - 28 2017