

CL-LED-RAI-D2-4/8 LED Direct Fixture

The RAI Lite D2 frosted lens and mounting kit creates a uniquely attractive direct lighting system.

Each D2 kit comes standard with a 4' or 8' UV-inhibiting frosted acrylic lens and brushed aluminum nuts for mounting. Accessories are available for continuous row mounting and for pendant or cable suspension.

The D2 is an excellent choice for open or higher-ceiling environments, or where direct and bright light is desired. Applications include retail stores, libraries, churches, higher-ceiling offices, and common areas. The D2 can also be used in wall-mounting applications.



Construction
22 gauge PFW steel high gloss fixture white finish

Colour Rendering Index
> 80 CRI

Lumen Maintenance
> 50,000 (L70)

Input Watts (4')
20.4W - 2800lm | 27.4W - 4400lm | 56.4W - 8000lm | 77W - 12000lm

Input Watts (8')
40.8W - 5600lm | 54.8W - 8800lm | 112.8W - 16000lm | 154W - 24000lm

Voltage
120/277V | 347V | 480V



Correlated Colour Temperature Options (CCT)
3000K | 3500K | 4000K | 5000K

Controls
0-10V Dimming (standard)
Operating Temperature
-40°C to 50°C

LED Array & Driver
> Philips Advance Xitanium Linear LED Driver with SimpleSet technology, 0-10V Dimming
> Philips Fortimo LV1 & LV3 LED Arrays



Warranty
> 10 years

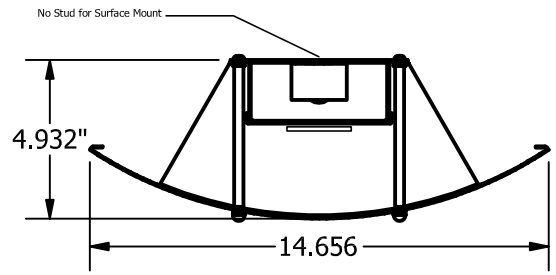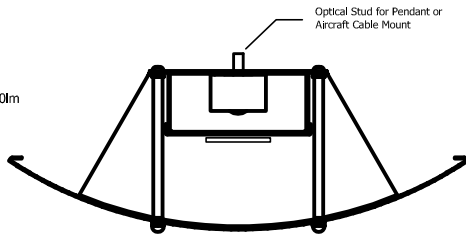

Ordering Logic (see page 2)

