

# CUSTOM LIGHTING LTD.

M A N U F A C T U R I N G • D E S I G N • T E C H N O L O G Y

## LED BALLAST COVER 4/8ft BALLAST COVER TO CONVERT T12HO TO LED

**Construction**  
22 gauge PFW steel high gloss fixture white finish

**Colour Rendering Index**  
> 80 CRI

**Lumen Maintenance**  
> 50,000 (L70)

**Input Watts (4ft)**  
34W - 5600lm | 53W - 8800lm | 150W - 24000lm

**Input Watts (8ft)**  
68W - 11200lm | 106W - 17600lm | 300W - 48000lm

**Voltage**  
120/277V | 347V | 480V

**Correlated Colour Temperature Options (CCT)**  
3000K | 3500K | 4000K | 5000K

**Controls**  
0-10V Dimming (standard)

Operating Temperature  
-40°C to 50°C


LED Array & Driver  
> Philips Advance Xitanlum Linear LED Driver with SimpleSet technology, 0-10V Dimming  
> Philips Fortimo LV1 & LV3 LED Arrays

**Certifications**




**Warranty**  
> 10 years


\*Cover dimension can vary depending on customer requirements.



SIDE VIEW

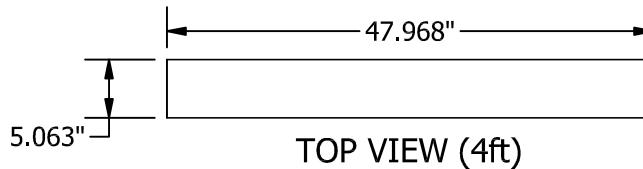

TOP VIEW (4ft)

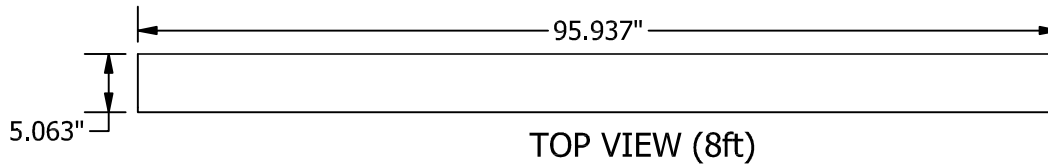

TOP VIEW (8ft)

**Ordering Logic** (Choose from available options)

Model	Finish	Voltage	Control	Correlated Colour Temperature	Lumen Output (4FT)	Lumen Output (8FT)
LED BALLAST COVER	<input type="checkbox"/> PFW	<input type="checkbox"/> UNV - 120-277V <input type="checkbox"/> 347 - 347V <input type="checkbox"/> 480 - 480V	<input type="checkbox"/> D10 - 0-10V DIMMING	<input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 35 - 3500K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> 5600lm (34W) <input type="checkbox"/> 8800lm (53W) <input type="checkbox"/> 24000lm (150W)	<input type="checkbox"/> 11200lm (68W) <input type="checkbox"/> 17600lm (106W) <input type="checkbox"/> 48000lm (300W)



**Custom Lighting Ltd.** 7923 Coronet Road, Edmonton, AB, T6E 4N7

Tel: (780) 463-8014 Fax: (780) 463-2216 Email: sales@customlightingltd.com [www.customlightingltd.com](http://www.customlightingltd.com)

FEB - 28 2017