

## CL-WSLC (1'x1')

### LED Ceiling Fixture


High efficiency low-profile dimmable LED ceiling fixture for general purpose applications, utilizing the latest in LED technology for optimal light output at minimal power draw.

Housing built from powder-coated 20 gauge steel. Lighting white acrylic lens with superior LED diffusing properties creates a uniform light source void of hot spots or luminance fluctuations.




CL-WSLC (1'x1')

All fixtures CSA approved.

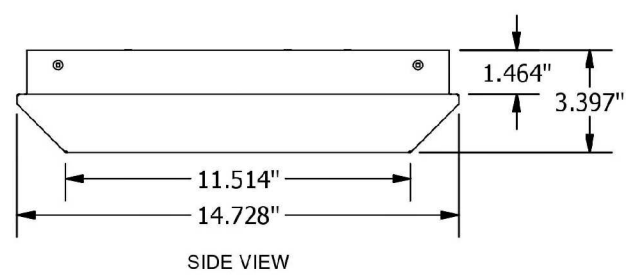

SIDE VIEW

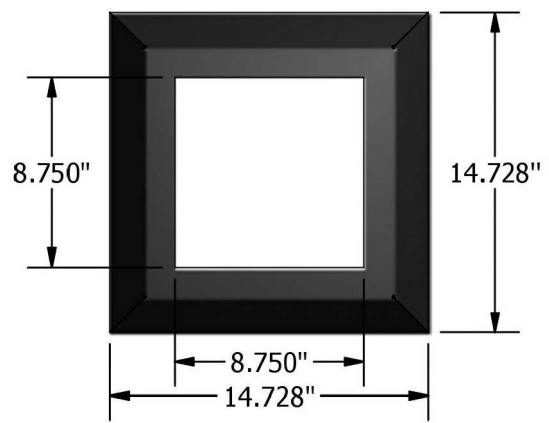

BOTTOM VIEW

#### Ordering Logic (Choose from available options)

Model	Voltage	Correlated Colour Temperature	Lumen Output	Lens	Fixture Colour
CL-WSLC	<input type="checkbox"/> 120-120V <input type="checkbox"/> 277 - 277V <input type="checkbox"/> 347 - 347V	<input type="checkbox"/> 30 - 3000K <input type="checkbox"/> 35 - 3500K <input type="checkbox"/> 40 - 4000K <input type="checkbox"/> 50 - 5000K	<input type="checkbox"/> 1300lm <input type="checkbox"/> 2200lm	<input type="checkbox"/> OP - LED White Acrylic	<input type="checkbox"/> TB - Texture Black <input type="checkbox"/> TW - Textured White <input type="checkbox"/> SP - Other (Please Specify)