

CUSTOM LIGHTING LTD.

M A N U F A C T U R I N G • D E S I G N • T E C H N O L O G Y

CL-LED-4-LS-9R

LED Recessed Fixture

The CL-LED-4-LS-9R is a recessed 1' x 4' luminaire suitable for general purpose or task lighting applications.

Housing constructed from 22 gauge pre-painted white steel. Hinged door frame built from 20 gauge steel powder coated after fabrication. K12 Acrylic lens is used to refract light evenly to prevent glaring. Quick access plate permits ease of installation.

Construction

Housing - PFW
Frame - 20 gauge White Paint (WH)

Colour Rendering Index

> 80 CRI

Lumen Maintenance

> 50,000 (L70)

Input Watts

32.8W - 5000lm | 40.8W - 5600lm | 61W - 8800lm | 113W - 16000lm | 154W - 24000lm

Voltage

120/277V | 347V | 480V

Correlated Colour Temperature Options (CCT)

3000K | 3500K | 4000K | 5000K

Controls

0-10V Dimming (standard)

Operating Temperature
-40°C to 50°C

LED Array & Driver


> Philips Advance Xitanium Linear LED Driver with SimpleSet technology, 0-10V Dimming
> Philips Fortimo LV1 & LV3 LED Arrays

Certifications




Warranty

> 10 years

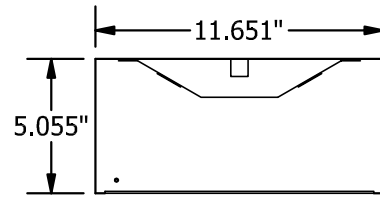

Fixture Length = 47.927"

Ordering Logic (Choose from available options)

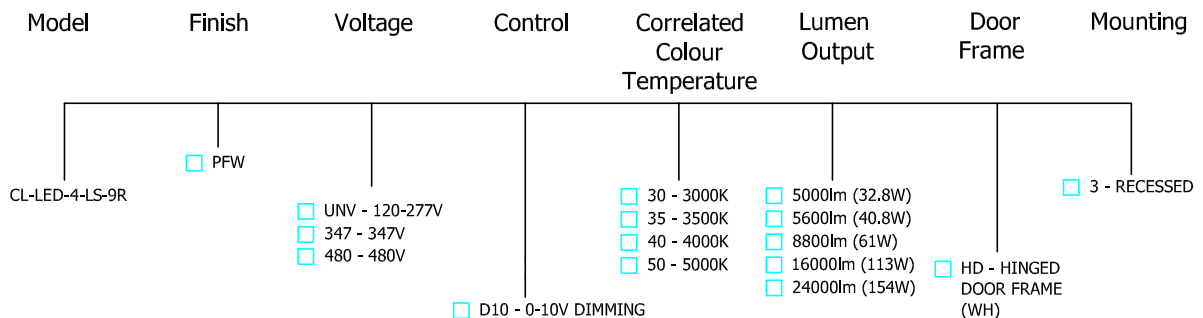

Custom Lighting Ltd. 7923 Coronet Road, Edmonton, AB, T6E 4N7

Tel: (780) 463-8014 Fax: (780) 463-2216 Email: sales@customlightingltd.com www.customlightingltd.com

FEB - 28 2017